

INSTRUCTIONS

IMPORTANT INFORMATION, KEEP FOR OPERATOR

This manual provides information for:

OVERFLOW DRAIN CLEANING PROCEDURE

- *SmartSteam Boilerless Steamer*

The overflow drain should be cleaned daily.

Information contained in this document is known to be current and accurate at the time of printing/creation. Unified Brands recommends referencing our product line websites, unifiedbrands.net, for the most updated product information and specifications.

PART NUMBER 176549, REV. A (04/18)



1055 Mendell Davis Drive
Jackson, MS 39272
888-994-7636, fax 888-864-7636
unifiedbrands.net

Cleaning



FIGURE 1

1. Turn your unit off and allow it to completely drain (Figure 1). SmartSteam units will drain automatically when the units are powered off. This is a 5 minute process.



FIGURE 2

2. Once the reservoir has completely drained (approximately 5 minutes), stand to the hinged side of the door (Figure 2), slowly open the door allowing all of the steam to escape from the cavity. Allow the cavity to completely cool down and confirm that the reservoir has completely emptied before cleaning the overflow drain.



FIGURE 3

3. Remove the steam lid (Figure 3) and fan cover assembly (Figure 4), prior to cleaning the overflow drain.



FIGURE 4

Cleaning

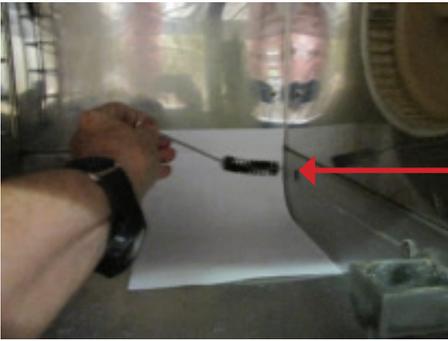


FIGURE 5

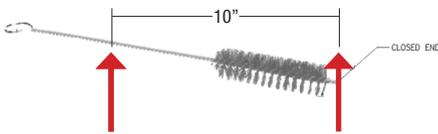


FIGURE 6

4. Insert the cleaning brush into the overflow drain located at the lower, back right side of your steamer's cavity (Figure 5). As the brush is pushed through the overflow drain, it will bend to follow the shape of the drain as it travels the length of the overflow drain. Once you use the cleaning brush for the first time, the wire between the handle and the bristles will retain a curved shape after the brush is removed from the overflow drain. The brush is designed to bend/curve in this fashion. There is no need to straighten the wire between cleanings/usage.

5. With the cleaning brush, push and pull through the entire length of the overflow drain several times. The brush should be inserted at least ten inches (10") into the overflow drain to pass through the entire length of the drain piping. Repeat as necessary until the overflow drain is clean. Ensure that the overflow drain works properly by squirting water into the overflow drain and confirming that the water is flowing freely into the drain receptacle and not being blocked and backing up into the steamer cavity.

If the overflow drain is clogged such that the cleaning brush will not clear the blockage or if water cannot move through the overflow drain into the drain receptacle without backing up into the steamer cavity, **then a service call needs to be made and all use of the steamer must be discontinued until the service agent evaluates the issue and confirms that the unit is ready for further operation.**

6. Clean the cooking cavity per the cleaning instructions in your operators' manual.
7. Re-install the steam lid and fan cover assembly.
8. Leave the door open to prolong the life of the door gasket and to allow the cavity to air out.
9. Clean, dry and store the overflow cleaning brush after each use.
10. If a replacement brush is needed, the part number is 175977.



1055 Mendell Davis Drive • Jackson MS 39272
888-994-7636 • 601-372-3903 • Fax 888-864-7636
unifiedbrands.net